Aluminum roller shutters

TECHNICAL CATALOGUE
Since 2011 / Foshan, Guangdong, China



Product selection, illustrated configurations and quotation preparation.

Choose the opening first

YULUX Windows supplies external window shutters and rolling shutter doors. Specify the curtain, box, guides and bottom assembly together.

For a window, show the reveal, sill and head-box position. For a garage or shop opening, mark the clear passage required with the curtain raised.

The product reference includes aluminium-alloy curtains, custom sizes and colours, foam-filled sections, solid and punched slats, matched guide rails and bottom profiles.



Materials and installation planning

Product layouts	Rolling shutter doors and external window shutters
Curtain material	Aluminium alloy; custom size and colour
Infill option	Polyurethane foam within the illustrated shutter profiles

Measure the opening width and height, available headroom and side fixing surfaces. Add photographs of the wall, lintel and sill.


Curtain-section dimensions identify individual profiles; they do not describe the maximum size of an assembled shutter. Confirm the curtain, guides, bottom seal and box against the opening drawing.

Rolling shutter door assembly

The assembly drawing identifies:

1. Shutter slats
2. Side guide rail
3. Bottom profile

Select each part as a matched assembly. The catalogue describes an EPDM bottom-seal detail. Confirm the bottom contact surface, guide fixings and operation method for the opening.

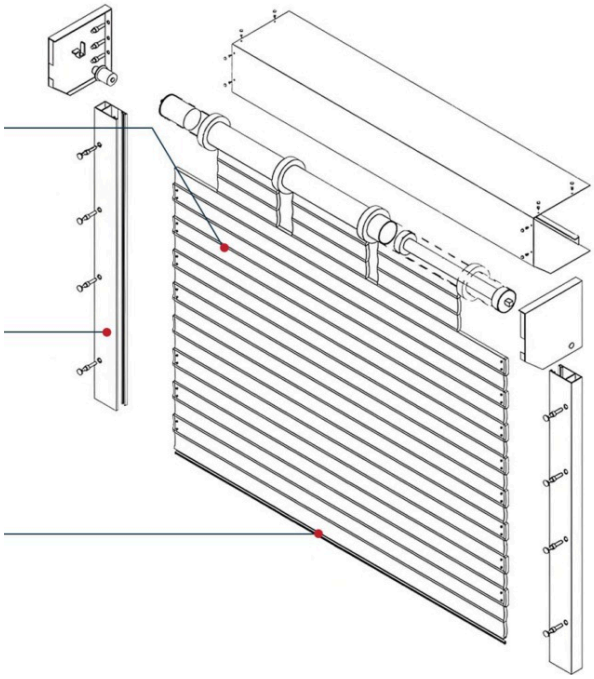

The leader lines identify the slats, side guide and bottom profile. Their labels are reproduced here in English.

Foam-filled shutter profiles



The upper leader identifies the aluminium shutter profile. The lower leader identifies its polyurethane foam infill.




Slat 001
Height: 57.3 mm
Top: 9.6 mm
Base: 11.3 mm

Slat 002
Height: 46.7 mm
Top: 8.2 mm


Slat sections and curtain patterns

Solid and punched curtain patterns are illustrated. Use the section drawings to select the matching curtain, guide and bottom profile.


Slat 003

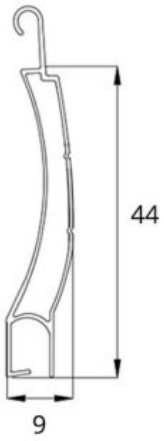


Slat 004 / punched

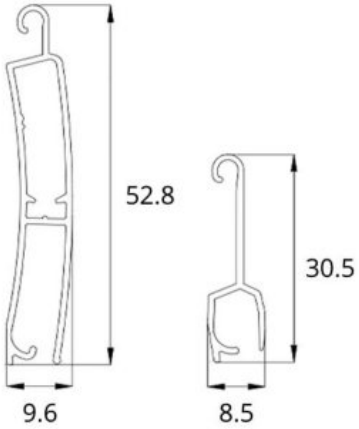

Slat 005

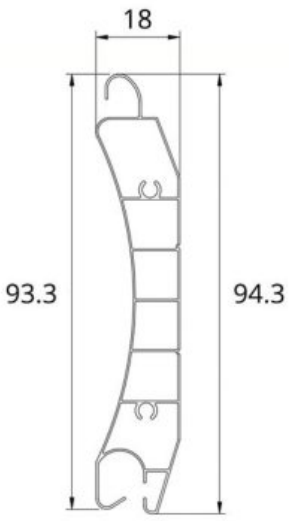


Slat 006

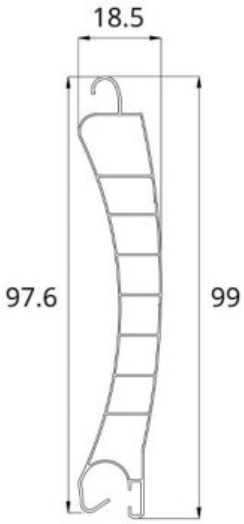


Guide and bottom profiles

Match the side guide and bottom profile to the selected curtain. Dimensions below describe catalogue sections, in millimetres.


RS01



RS02




Bottom 001




Bottom 002




Bottom 003



Guide rail 001



Guide rail 002



Residential and commercial openings



Residential windows: coordinate the head box, reveal and required ventilation position.

Shops and garage openings: record the raised clear opening, guide fixings and bottom contact surface.

Renovations: photograph the wall, lintel, sill and available fixing space.


External window shutter assembly

List the glazing and external shutter separately in the opening schedule.

Include the head-box position, side fixing space and access for operation or maintenance.

The drawing leaders indicate the curtain slats, side guides and bottom profile.

Curtain material: aluminium alloy. Size and colour are configured for the opening.

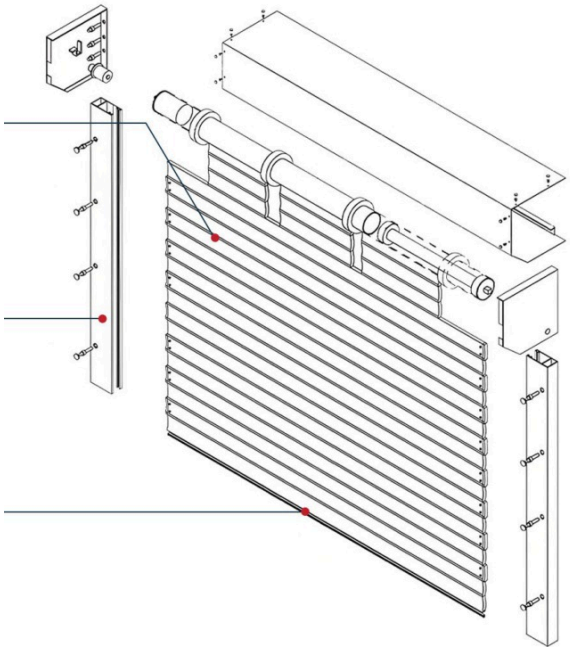

Window-shutter infill and sections



The upper leader identifies the aluminium shutter profile. The lower leader identifies its polyurethane foam infill.




Slat 001
Height: 57.3 mm
Top: 9.6 mm
Base: 11.3 mm

Slat 002
Height: 46.7 mm
Top: 8.2 mm


Window-shutter curtain options

Solid and punched curtain patterns are illustrated. Use the section drawings to select the matching curtain, guide and bottom profile.


Slat 003

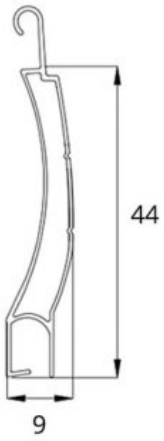


Slat 004 / punched

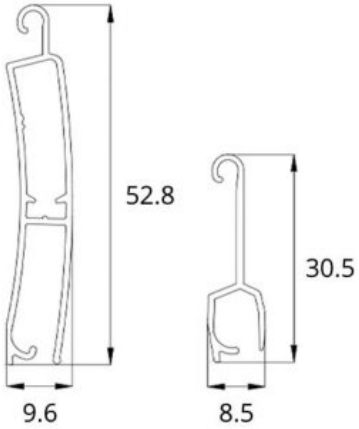

Slat 005

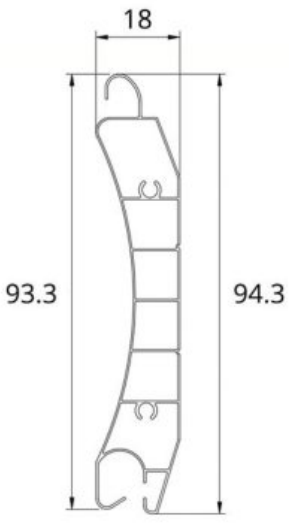


Slat 006

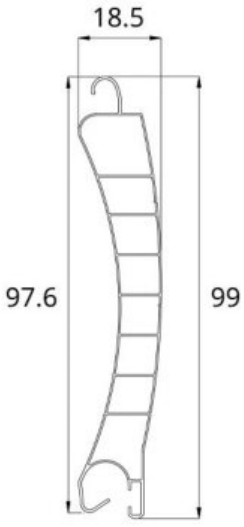


Window-shutter guides and bottom details

Match the side guide and bottom profile to the selected curtain. Dimensions below describe catalogue sections, in millimetres.


RS01



RS02




Bottom 001




Bottom 002




Bottom 003



Guide rail 001



Guide rail 002



Prepare a shutter quotation

1. Opening width and height, with the required clear opening.
2. Headroom, side fixing space and head-box position.
3. Window-shutter or rolling-door use, quantities and opening marks.
4. Curtain pattern, infill and colour reference.
5. Operation method and available power, if relevant.
6. Site photographs, destination and packing requirements.

Discuss your project

Since 2011
Foshan, Guangdong, China

YULUX Windows
yuluxwindows.com
WhatsApp: +86 158 8014 9725
sales@yuluxwindows.com

Send opening dimensions, quantities, selected designs and delivery destination.

Orders start from 1 unit. Payment: 50% deposit and 50% before shipment. Production scheduling follows the order quantity and confirmed configuration.